

Display Elektronik GmbH

DATA SHEET

OLED MODULE

DEP 466466A-RGB

(C-TOUCH)

1,4“ AM-OLED

Product Specification

Version: 0

12.05.2026

Contents

1. Block Diagram.....5

2. Outline dimension.....6

3. Input terminal Pin Assignment.....7

4. AMOLED Optical Characteristics.....8

 4.1 Optical specification.....8

5. AMOLED Electrical Characteristics 11

 5.1 Absolute Maximum Rating (Ta=25 VSS=0V) 11

 5.2 DC Electrical Characteristics 11

6. AC Characteristic..... 12

 6.1 Write Cycle and Sequence.....12

 6.2 Reset Function13

 6.3 Power On Sequence14

 6.4 Power OFF Sequence.....15

7. Quality Level..... 16

 7.1 Standard16

8. Reliability Test Result 17

9. Cautions and Handling Precautions 18

 9.1 Handling Precautions:.....18

*** Description**

This is a color active matrix AMOLED module using Low Temperature Poly-Silicone Thin Film Transistors as active switching devices. This module has a 1.43 Inch diagonally measured active area with 466horizontal by 466 vertical pixel arrays.

Each pixel is divided into RED and GREEN dots, or BLUE and GREEN dots, and two pixels share RED or BLUE dots which are arranged in vertical stripe and this module can display up to 16.7 Million colors.

*** Features**

General Information Items	Specification	Unit	Note
	Main Panel		
Display Area (AA)	Φ36.35 (1.43 Inch)	mm	-
Display Colors	16.7 Million	colors	-
Pixel Pitch	0.078 x 0.078	mm	-
Number of Pixels	466 x (RGB) x 466	dots	-
Viewing Angle	ALL	o'clock	-
Controller IC	CO5300	-	-
Touch Controller IC	CST820 (Oncell)	-	-
LCM Interface	QSPI	-	-
Display Mode	AMOLED	-	-
Operating Temperature	-20°C to +70°C	°C	-
Storage Temperature	-30°C to +80°C	°C	-


*** Mechanical Information**

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal(H)	-	40.86	-	mm	-
	Vertical(V)	-	51.97	-	mm	NOTE2
	Depth(D)	-	2.76	-	mm	NOTE1
Weight		-	8	-	g	-

NOTE1: Flat thickness without any bending


NOTE2: Including the length of the FPC after bending

1. Block Diagram

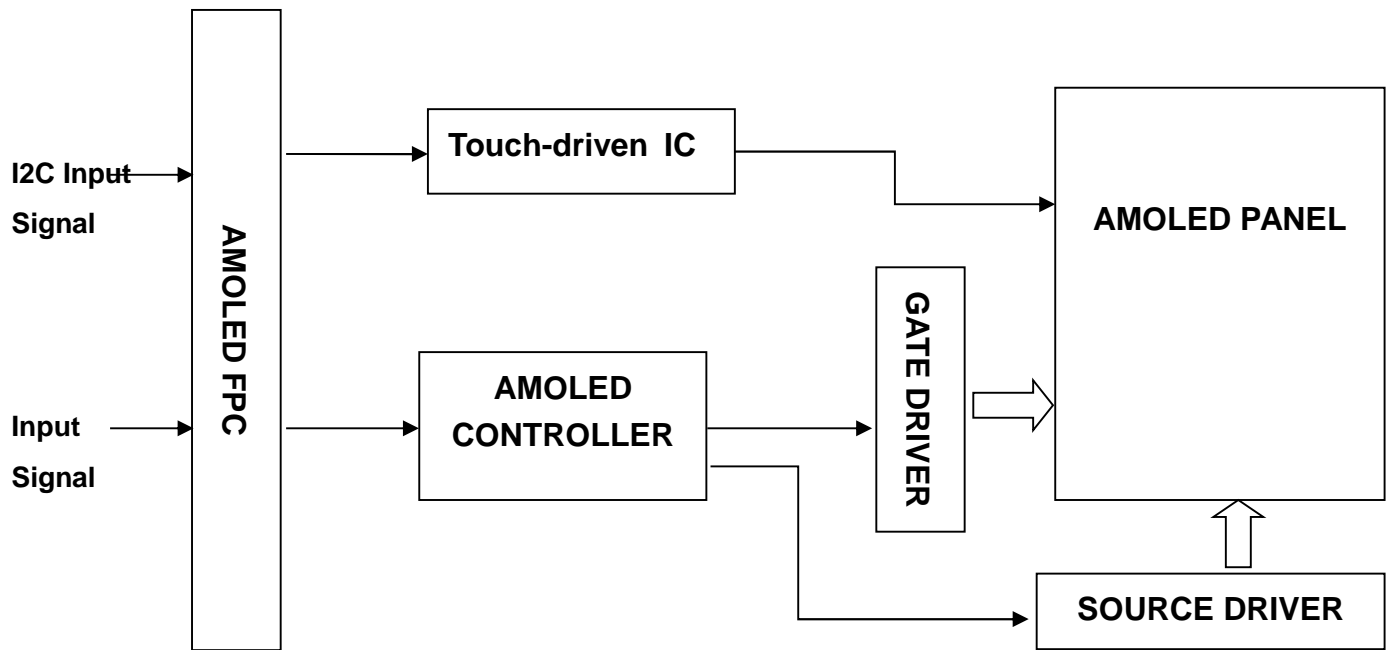


2. Outline Dimension

- NOTES:
1. DISPLAY TYPE: 1.43", OLED
 2. DISPLAY MODE: LTPS-AMOLED,NORMAL BLACK
 3. VIEWING DIRECTION: ALL
 4. OLED DRIVER IC: CO5300AF-40(COF)
 5. OLED INTERFACE: SPI
 6. TOUCH MODE: MULTI TOUCH,ONCELL CTP
 7. TOUCH DRIVER: CST820B
 8. CTP INTERFACE: I2C
 9. LENS AND OLED BONDING TECHNOLOGY: OPTICAL BONDING
 10. VDD: 2.8V,VI0:1.8V,CTP VDD:3.3V
 11. FRAME RATE:90Hz
 12. OPERATING TEMP: -20°C TO 70°C
 13. STORAGE TEMP: -30°C TO 80°C
 14. OLED+LENS BRIGHTNESS: 400 CD/M2(MIN),450 CD/M2(TYP.)
 14. RoHS and REACH COMPLIANT.

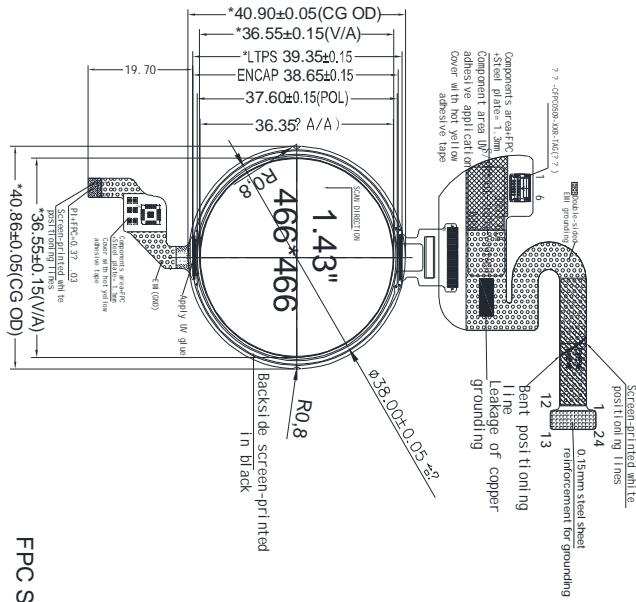


Front view

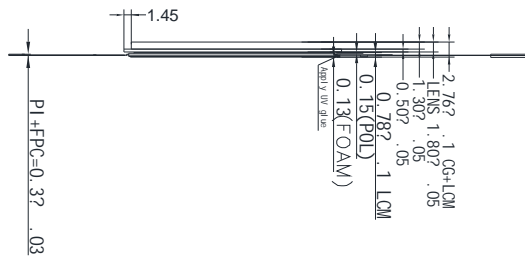

Side view

FPC Stretching mode shipment

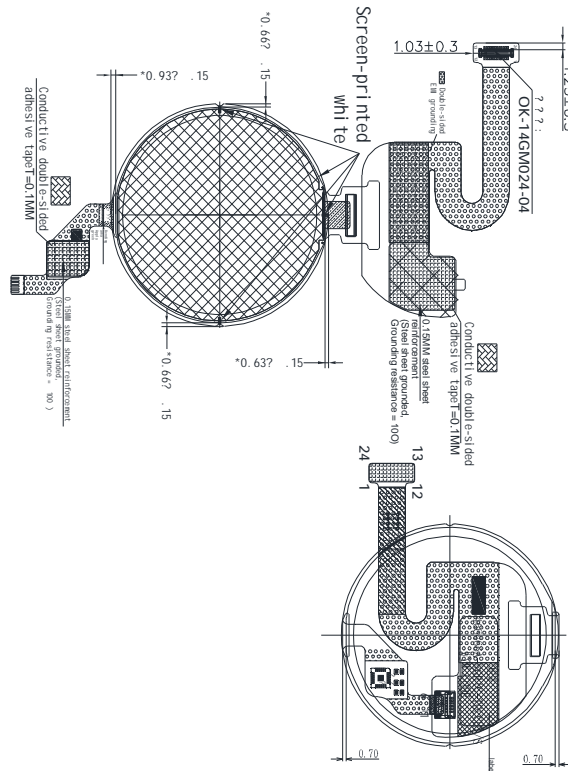

Bottom view

Diagram bending view

3. Input terminal Pin Assignment

Connector: OK-14GM024-04

NO.	SYMBOL	DISCRIPTION	I/O
1	LCD_CS	Chip Select Signal in MIPI DBI Type-B(MPU) and Type-C(SPI) Active Low	I
2	SPI_SI00	Serial Data Input in Quad-SPI	I
3	SPI_SI01		I
4	SPI_CLK	Serial Clock Input in Quad-SPI	I
5	SPI_SI03	Serial Data Input in Quad-SPI	I
6	SPI_SI02		I
7	LCD_DET	GND	I
8	VCI_EN	Power Supply enabled (3.3V)	I
9	LCD_RST	Device reset signal (3.3V)	I
10	MTP	External Voltage Input for OTP Data Program	I
11	LCD_VDD	Power Supply for Analog Circuits (3.3V)	P
12	GND	Ground	P
13	GND	Ground	P
14	LCD_TE	Tearing effect output pin to synchronize MCU to frame	O
15	LCD_VDD	Power Supply for Analog Circuits (3.3V)	P
16	NC	NC	--
17	VBAT	Power Supply for POWER IC	P
18	NC	NC	
19	TP_SCL	Touch Panel clock (3.3V I/O)	I
20	TP_SDA	Touch Panel Data (3.3V I/O)	I
21	TP_RST	Touch Panel Reset (3.3V I/O)	I
22	TP_INT	Touch Panel Interrupt	O
23	TP_VDD	Power Supply for touch IC (3.3V)	P
24	GND	Ground	P

4. AMOLED Optical Characteristics

4.1 Optical Specification

Item	Symbol	Condition	Min.	Typ.	Max.	Unit.	Note	
Contrast Ratio	CR	$\Theta=0$ Normal Viewing Angle	100000	--	--		(1)(2)	
LCM Luminance	LV	White Mode	700	800	--	cd/m2		
Color Gamut	S(%)	vs. NTSC	90	100	--	%	(1)	
Color Filter Chromaticity	White	W_x	--	-0.04	0.300	+0.04	--	(1)(4)
		W_y	--		0.310			
	Red	R_x	--		0.673			
		R_y	--		0.326			
	Green	G_x	--		0.230			
		G_y	--		0.686			
	Blue	B_x	--		0.140			
		B_y	--		0.042			
OLED Lifetime	--	--	30000	--	--	Hrs	--	
Option View	ALL							

Measuring Condition

Measuring surrounding: Dark Room


Ambient temperature: 25°C ± 2°C

15min. warm-up time.

Measuring Equipment

FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.


Note (1): Definition of Viewing Angle:

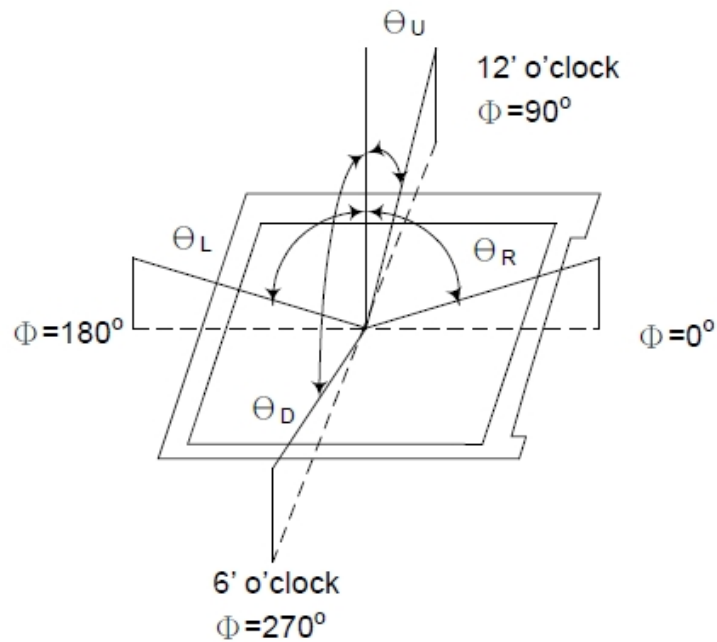


Note (2): Definition of Contrast Ratio(CR) :measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Note (3): Response Time

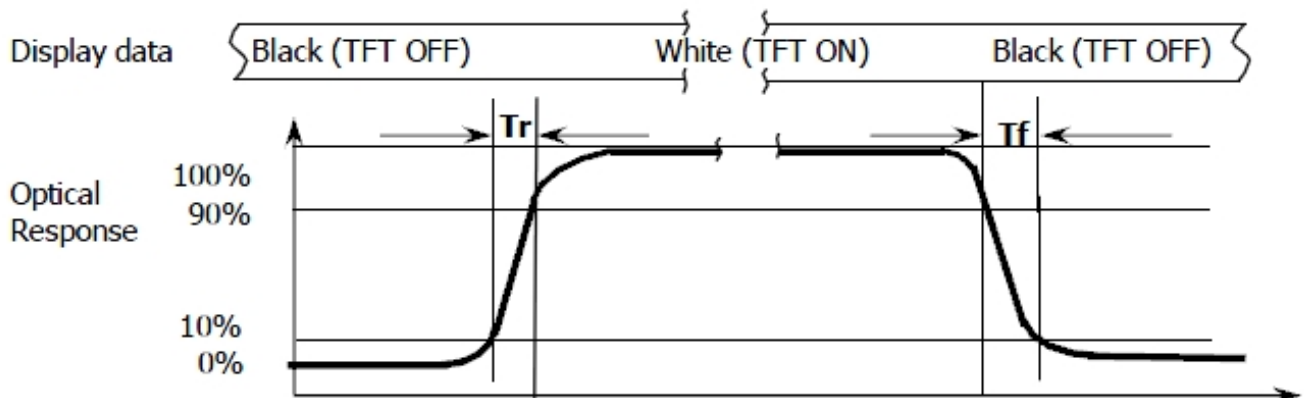

Note (4): Definition of optical measurement setup

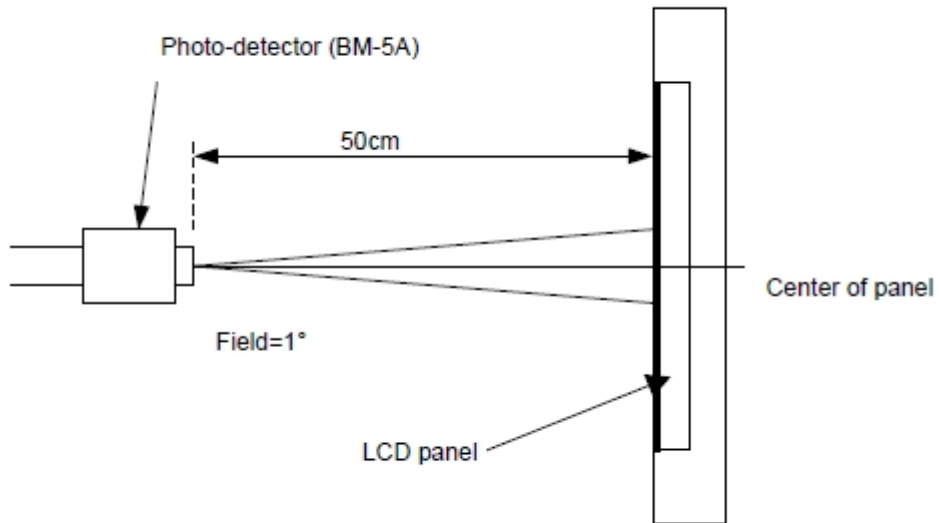

5. AMOLED Electrical Characteristics

5.1 Absolute Maximum Rating (Ta=25 VSS=0V)

Characteristics	Symbol	Min.	Max.	Unit
Analog Power Supply	VDD	-0.3	3.6	V
Power IC Supply	VBAT	0	5.0	V
TP Power Supply Voltage	TP_VDD	-0.3	3.6	V
Operating Temperature	T _{OP}	-20	+70	°C
Storage Temperature	T _{ST}	-30	+80	°C

NOTE: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Analog Power Supply	VDD	2.7	3.3	3.6	V	--
Normal Mode Current Consumption	IDD	--	10	--	mA	--
Power IC Supply	VBAT	3.45	3.7	5	V	--
	I _{VBAT}	--	50	100		--
TP Power Supply Voltage	TP_VDD	2.7	3.3	3.6	V	--

6. AC Characteristic

6.1 Write Cycle and Sequence

The QUAD SPI interface write command sequences are described in the following figure as below.

QSPI write protocol contain as below :

Instruction[7:0] = 02h

AD[23:0] = {8'h00, CMD[7:0], 8'h00}

PAM[7:0]

Command write

Driver IC command address

Driver IC parameters


QSPI 1-wire write



QSPI 2-wire write




QSPI 4-wire write

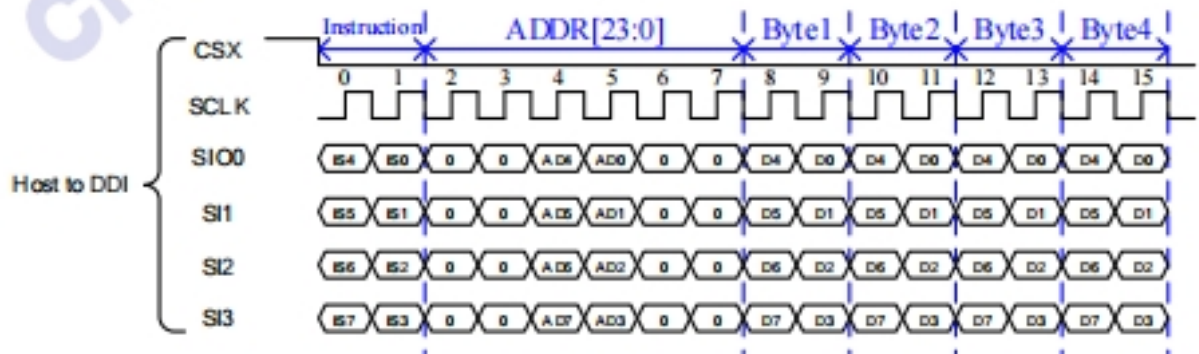


6.2 Reset Function

2.Reset Function


If the host is operating in 1-wire SPI protocol and the driver IC is operating in 2-wire or 4-wire SPI protocol, then the DDIC interface is reset to 1-wire SPI.

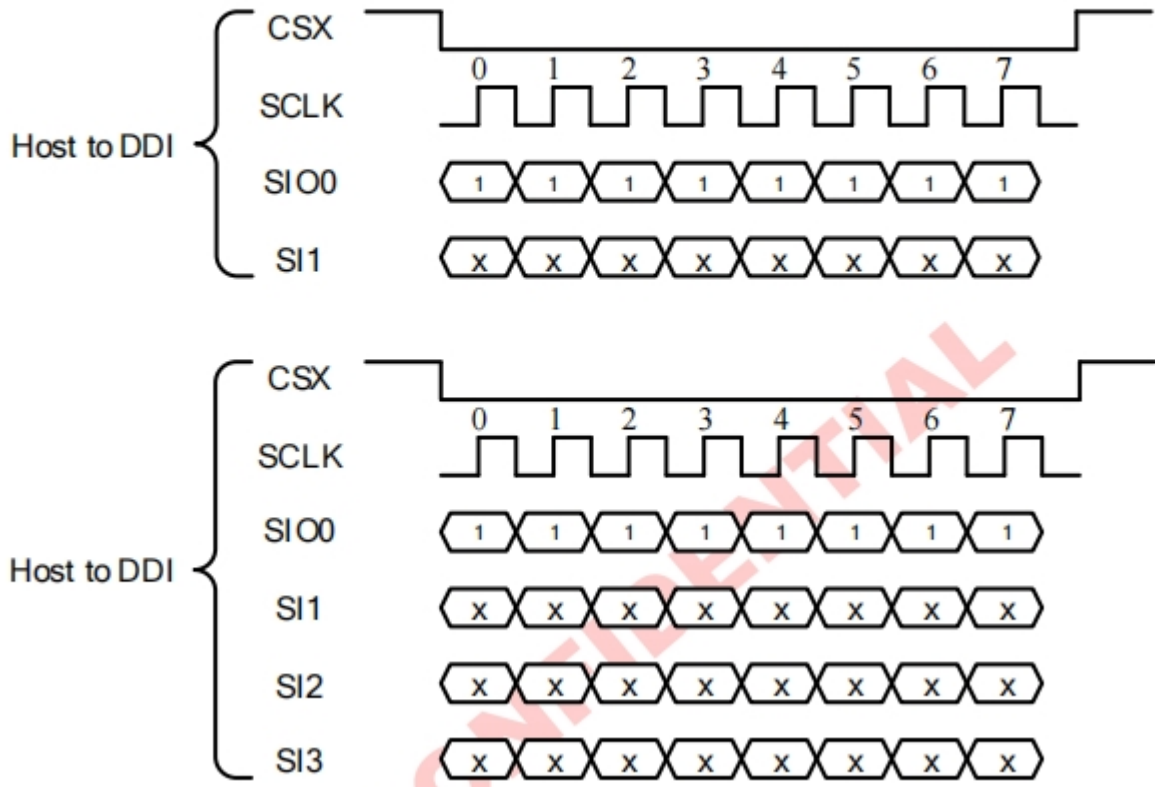

6.3 Power On Sequence

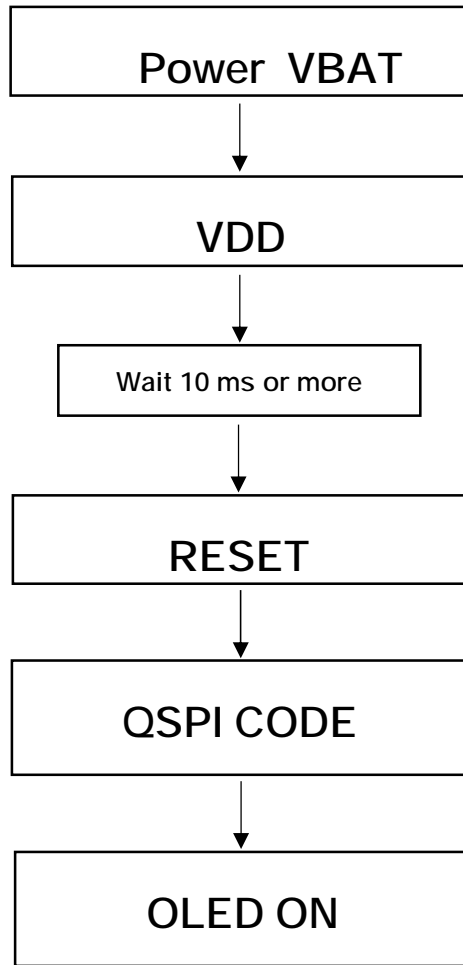

6.4 Power OFF Sequence

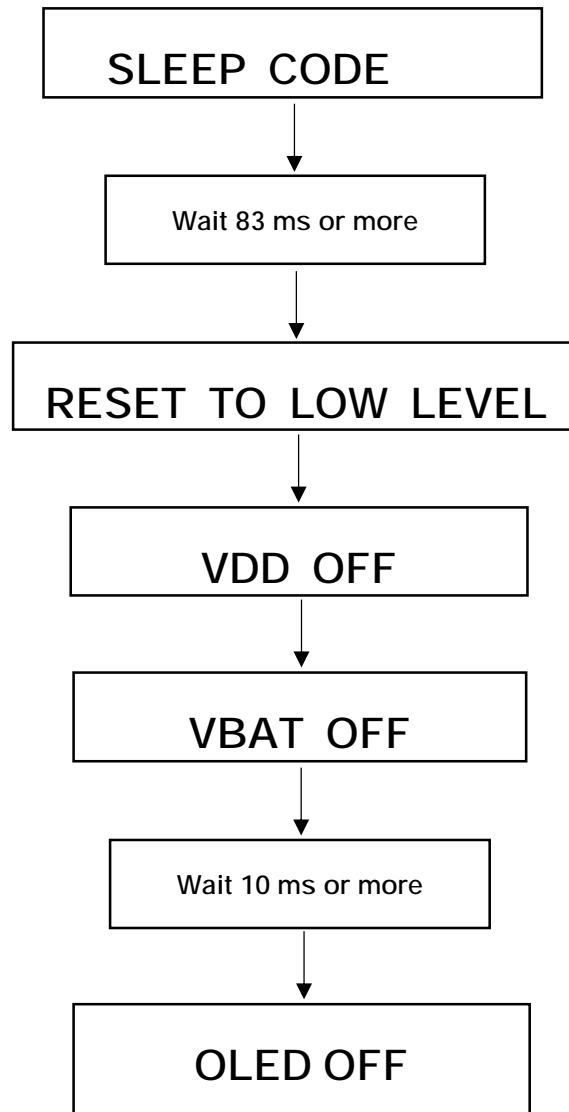

7. Quality Level

7.1 Standard

According to GB/T2828.1-2003/ISO 2859-1:1999 and ANSI/ASQC Z1.4-1993, General Inspection Level II and based on Major Defect: AQL 0.65, Minor Defect: AQL 1.5.

7.2 Definition

Major Defect: The defect that greatly affect the usability of product.

Minor Defect: The other defects, such as cosmetic defects, etc.

Definition of Inspection Zone

Zone A: Active Area

Zone B: Viewing Area except Zone A Zone

C: Outside Viewing Area

Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble of quality and assembly to customer's product.

7.3 Inspection Methods

1. General Inspection: under 20W x 2 or 40W fluorescent light (1000+200LUX), about 30cm viewing distance, within 45° viewing angle, under 25°C±5°C.
Inspection Pattern: Red/Green/Blue/White/Black/128 gray scale
2. The Brightness and Color Coordinate Inspection: By CS2000/09A-OLED-117 or the equal equipment, in the dark room, under 25°C±5°C.

8. Reliability Test Result

Item	Condition	Inspection after test
High Temperature Operating	+70°C, 96h	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1. Air bubble in the OLED; 2. Non-display; 3. Missing segments/line; 4. Glass crack; 5. Current IDD is twice higher than initial value.
Low Temperature Operating	-20°C, 96h	
High Temperature Storage	+80°C, 96h	
Low Temperature Storage	-30°C, 96h	
High Temperature & High Humidity Storage	+60°C, 90% RH, 96h	
Thermal Shock (Non-operation)	-20°C, 30 min ↔ +70°C, 30 min, Change time: 5min 20CYC.	
ESD Test	C=150pF, R=330,5points/panel Air:±4kV, 5times; Contact:±4kV, 5 times (Environment: 15°C~35°C, 30%~60%)	

Remark:

1. The test samples should be applied to only one test item.
2. Sample size for each test item is 5~10pcs.
3. For Damp Proof Test, Pure water (Resistance > 10MΩ) should be used.
4. In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
5. Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.
6. The color fading mura of polarizing filter should not care.

9. Cautions and Handling Precautions

9.1 Handling Precautions:

- (1) The display panel is made of glass and polarizer. As glass is fragile. It tends to become chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.
- (2) Do not apply excessive force to the display surface or the adjoining areas since this may cause abnormal. Do not touch the display with bare hands. This will stain the display area (some cosmetics are determined to the polarizer).
- (3) The polarizer covering the display surface of the OLED module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on it. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming in to contact with room temperature air.
- (4) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents.
 - Isopropyl alcohol
 - Ethyl alcoholDo not scrub hard to avoid damaging the display surface.
- (5) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solventsWipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil and fats.
- (6) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (7) When mounting the OLED module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable.
- (8) Do not attempt to disassemble or process the OLED module.
- (9) NC terminal should be open. Do not connect anything.
- (10) If the logic circuit power is off, do not apply the input signals.
- (11) To protect the display surface, the AMOLED Module is coated with a film. Be careful when peeling off this protective film, because static electricity may generate.