

**Display Elektronik GmbH**

# DATA SHEET

**Control Button**

**DE CB-240240C VMH-PW-N**

**Product Specification:**

**Ver. 0**

**12.12.2024**

**Revision History**

<b>Revision</b>	<b>Date</b>	<b>Originator</b>	<b>Detail</b>	<b>Remarks</b>
0	12.12.2024	LQ	Initial Release	

**Table of Contents**

No.	Item	Page
1.	General Description .....	4
1.1.	Module serial port control function: .....	4
1.2.	Product application: .....	4
2.	Basic Parameters.....	4
3.	Mechanical Characteristics .....	5
3.1.	Appearance picture .....	5
3.2.	Basic Structure .....	5
3.3.	Outline Drawing .....	6
4.	Interface Pins Definition .....	7
5.	Module Parameter .....	7
6.	Optical Characteristics .....	8
7.	Reliability.....	10
8.	Product Packaging Information.....	12

## **1. General Description**

DE-CB 240240C VMH-PW-N series module is a module that perfectly combines the display screen, encoder, push button and status LED into a rotating button display. The unique innovative structure and exquisite manufacturing process of the module make it have excellent reliability and excellent control experience. It is applicable to the demand of rotating button control in many industrial applications of electronic products

### **1.1. Module serial port control function:**

1. The module contains MCU. The TFT display is driven and controlled by the MCU and its peripheral device.
2. The module MCU has the communication function with the external HOST MCU according to the specified protocol, and can transmit control commands and display information to each other.
3. The GUI (graphical interface) of the module can be stored in the flash(flash size:16 megabytes) of the module, and can be customized according to the product application.
4. There is special software which can efficiently develop beautiful image and complex control GUI.

### **1.2. Product application:**

1. Smart home appliances: smart refrigerators, household and commercial air conditioners, washing machines, stoves, entertainment electronic devices, and smart home central control modules.
2. Medical beauty products: medical testing instruments, health physiotherapy instruments.
3. Instruments: automobile monitor, motorcycle instrument, building management, security monitoring instrument.
4. Industrial control instruments: electromechanical equipment control display, charging equipment, elevator floor control and display, ordering machine.

## **2. Basic Parameters**


1. 1.32 Inch Circular Display 240 x RGB x 240 TFT / USB Burn + Serial Port
2. Annular Status LED indicator
3. EC2801-AX-15/11-15P3 Encoder
4. Integral Push Button
5. FPC Standard 0.3mm -10P Interface
6. Three Point Standard Screw Installation
7. MCU: LT168A (Levetop)

**3. Mechanical Characteristics**


**3.1. Appearance picture**




**3.2. Basic Structure**

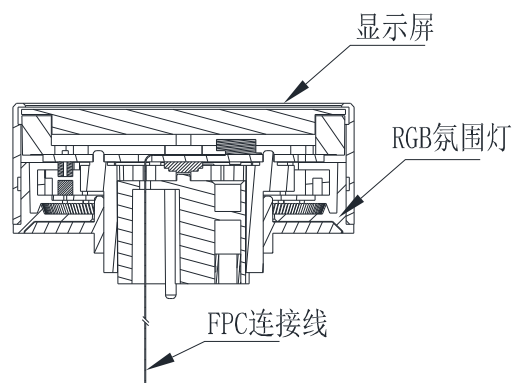

3.3. Outline Drawing

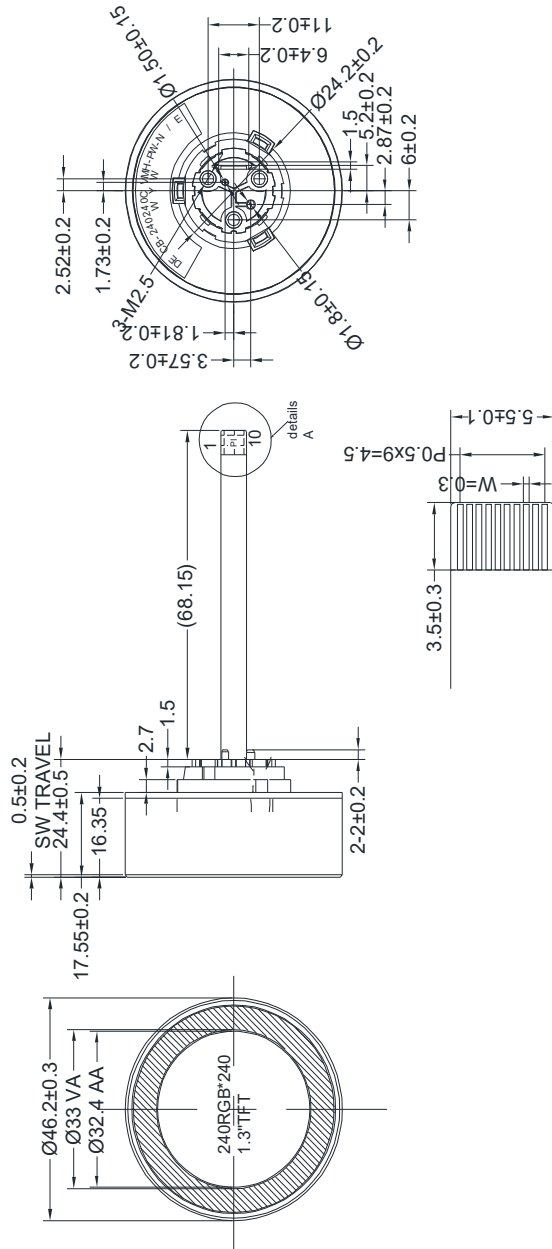

Contact side  
Stiffener



details A 4:1

- NOTES:
1. Display size: 1.3" TFT
  2. Viewing direction: FULL VIEW
  3. Display mode: Transmissive/Normal Black
  4. Operation temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
  5. Storage temperature:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  6. Brightness: 300(TYP) cd/m<sup>2</sup>
  7. ROHS must be complied
  8. The dimension with mark brackets "( )" just for reference
- \* Unspecification tolerance are ? 0.3mm

PIN FUNCTION

PIN	SYMBOL
1	5V
2	5V
3	NC
4	D-
5	D+
6	TX
7	RX
8	BUSY
9	GND
10	GND

**4. Interface Pins Definition**

<b>PIN</b>	<b>Symbol</b>	<b>Definition</b>	<b>Remarks</b>
1	5V	Power Supply	-
2	5V	Power Supply	-
3	NC	No connection	-
4	D-	Signal input negative	-
5	D+	Signal input positive	-
6	TX	Signal Transmit	-
7	RX	Signal Receive	-
8	BUSY	BUSY signal input	-
9	GND	Ground	-
10	GND	Ground	-

**5. Module Parameter**

<b>Features</b>	<b>Details</b>	<b>Remark</b>
Module Size	46.20 x 46.20 x 17.55 mm	-
Viewing Area	Φ33 (W/H) mm	-
Active Area	Φ32.4 (W/H) mm	-
Display Size	1.3"	-
View Direction	ALL	-
Display Mode	IPS, Transmissive / Normal Black	-
Color	262k	-
Resolution	240 x RGB x 240	-
Driver IC	GC9A01 (Galaxycore)	-
MCU	LT168A (Livetop)	-
Luminance	300cd/m <sup>2</sup>	-
Operating Temperature	-20°C ~ 70°C	-
Storage Temperature	-30°C ~ 80°C	-
Operating Voltage	4.8Volt ~ 5.2 Volt, typ: 5.0 Volt	-
Current Consumption	(250)mA	-
Weight	t.b.d.	-

## 6. Optical Characteristics

Ta=25°C


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Contrast Ratio	C/R	$\theta = 0^\circ$	700	900	-	-	Note(4)
NTSC Ratio	S	$\theta = 0^\circ$	55	60	-	%	Note(7)
Luminance	L	$\theta = 0^\circ$	240	300	-	cd/m <sup>2</sup>	Note(5)
Luminance uniformity	UW	$\theta = 0^\circ$	70	80	-	%	Note(3)
Response Time	TR+ TF	25 °C	-	30	40	ms	Note(2)
Color Coordination	R <sub>x</sub>	$\theta = 0^\circ$ (Center) Normal viewing angle B/L On	-0.05	0.615	+0.05	NTSC (x,y)	Note(6)
	R <sub>y</sub>			0.358			
	G <sub>x</sub>			0.339			
	G <sub>y</sub>			0.621			
	B <sub>x</sub>			0.148			
	B <sub>y</sub>			0.097			
	W <sub>x</sub>			0.300			
	W <sub>y</sub>			0.351			
Viewing Angle	$\theta L$	C/R>10	80	85	-	Degree	Note(1)
	$\theta R$		80	85	-		
	$\theta U$		80	85	-		
	$\theta D$		80	85	-		

Test Conditions:


1. VDD=3.3V, IF=20mA (Backlight current), the ambient temperature is +25°C.
2. The test systems refer to Note 8.

**Note1:** Definition of Viewing Angle: The viewing angle range that the CR>10



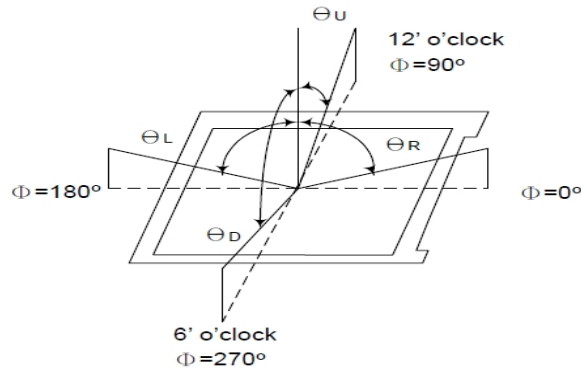


**Note2:** Definition of Response time: Sum of TR and TF

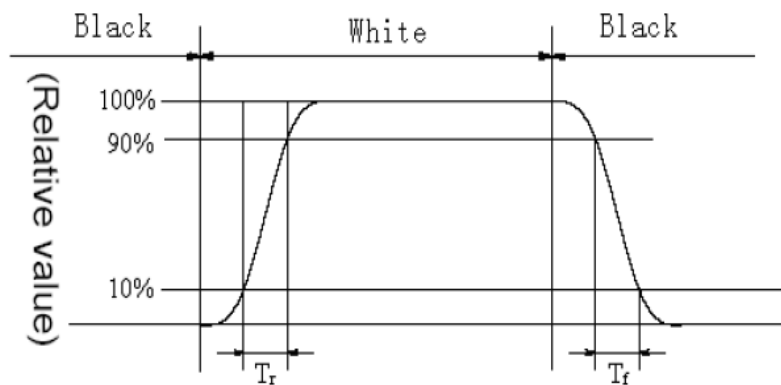

**Note 3:** Definition of Luminance Uniformity: Active area is divided into 9 measuring areas, every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity} = \frac{\text{Minimum Luminance}}{\text{Maximum Luminance}} \times 100\%$$

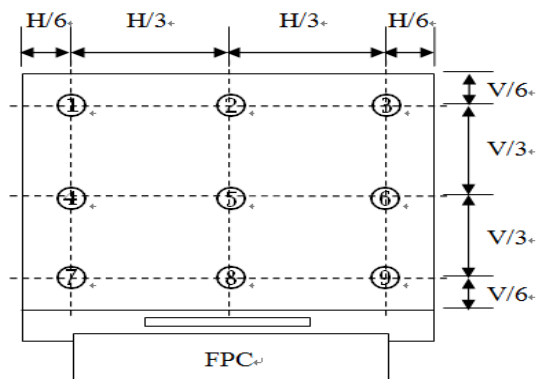

**Note4:** Definition of Contrast Ratio (CR): measured at the center point of panel

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$


**Note 5:** Definition of Luminance: Center Luminance of white is defined as luminance values of 1point average across the LCD surface.

**Note 6:** Definition of Color Chromaticity (CIE 1931)

Color coordinates of white & red, green, blue measured at center point of LCD.


**Note 7:** Definition of NTSC ratio:

$$\text{NTSC ratio} = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}}$$

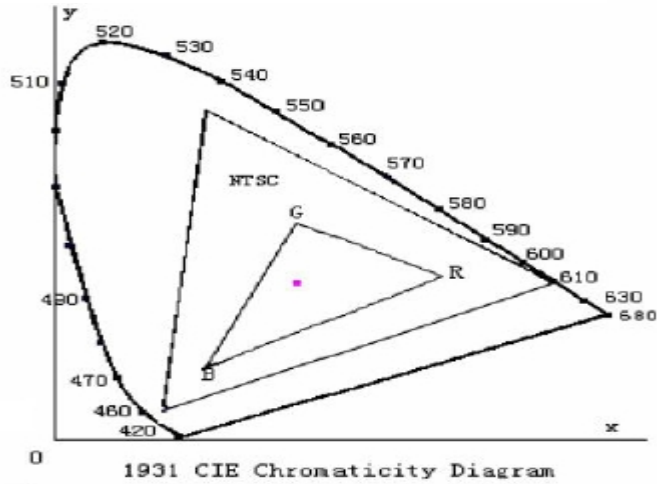

**Note 8:** Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, Field of view: 1°/Height: 500mm.)

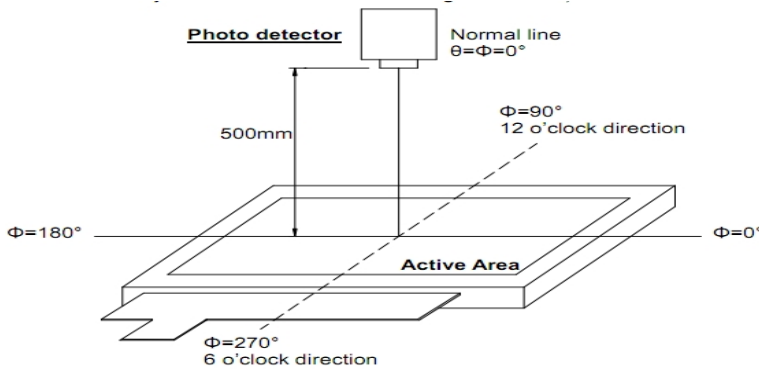

**7. Reliability**

Item	Test Condition	SPECIFICATIONS
Insulation Impedance	Apply a voltage of 250V DC between the metal outer rotating button and the base for 1 minute.	The resistance between the metal outer rotating button and the base is more than 100M Ω.
Rated Voltage	Apply a voltage of 300V AC between the metal outer rotating button and the base for 1 minute.	No insulation damage
Full Rotation Angle		360° (No stop point)
Rotation Torque		15±7mN.m (150±70gf.cm)
Positioning Points and Positions		30 positioning points (interval angle 12°±2 °)
Axial Compression Strength	At the shaft end, apply a static load force of 5Kgf along the axial direction and press down for 10 seconds (the screw is fixed on the face shell).	The shaft is not damaged and press is normal; The electrical performance is normal
Axial Drawing Strength	At the shaft end, apply a static load force of 5Kgf along the axial direction and pull up for 10 seconds (the screw is fixed on the face shell).	The shaft is not damaged and press is normal; The electrical performance is normal
Rotational Life	Under no-load condition, the shaft rotates 30000 at the speed of 600 ~ 1000 cycles / hour (1 cycle refers to 360° clockwise and 360° counterclockwise)	Torque: - 50% ~ + 10% of the initial value Rotating button display LCD can be powered on and adjusted normally.
High Humidity Experiment	60 ± 3°C, 90 ~ 95%RH, 96 ± 4Hrs Before function test and visual inspection, the product must have enough recovery time, at least 1.5 hours in normal temperature and humidity.	The surface of the outer rotating button is free of cracking and bubbling, and the display screen is free of OCA falling off. Rotating button display LCD can be powered on and adjusted normally.
High Temperature Experiment	70 ± 3°C, 96 ± 4Hrs Before function test and visual inspection, the product must have enough recovery time, at least 1.5 hours in normal temperature and humidity.	The surface of the outer rotating button is free of cracking and bubbling, and the display screen is free of OCA falling off. Rotating button display LCD can be powered on and adjusted normally.

Thermal Cycling Test	阶段 step	温度 Temperature	放置时间 Durationure	The surface of the outer rotating button is free of cracking and bubbling, and the display screen is free of OCA falling off. Rotating button display LCD can be powered on and adjusted normally.
	1	-20℃	0.5 hour	
	2	常温 standard atmospheric conditions	0.5 hour	
	3	70℃	0.5 hour	
	4	常温 standard atmospheric conditions	0.5 hour	
试验周期: 5周 test cycle: 5 cycles				
Before function test and visual inspection, the product must have enough recovery time, at least 1.5 hours in normal temperature and humidity.				
Force of Pressing the Rotating Button	Apply an axial force to the face cover plate until it does not move, and take the large value in the force application process.			250±30gf
Movement Amount of Pressing the Rotating Button	Fix the product on the face cover plate, apply a static load force of twice the driving force directly above the cover plate, and measure the moving distance when the rotating button is pressed to immobility.			1.3±0.2 mm
Press Life of the Rotating Button	After the product is fixed, apply a pressing pressure of 250±30gf axially, press it to the end and release it to let it return freely. Press 100000 times. The pressing speed is 1500-1800 times per hour.			The pressing force is - 50% ~ + 10% of the initial value. Rotating button display LCD can be powered on and adjusted normally. The plastic part is free of damage, deformation and rotation is normal.

## 8. Product Packaging Information

Storage environment and conditions:

1. It shall be stored in a well ventilated environment with temperature of - 15℃ ~ + 25℃, relative humidity of 40% - 65% and no harmful gas around.
2. During storage and transportation, the stacking height of products shall not exceed 5 boxes.

Items	Normal Parameters	Limit Parameters	Material Valid Status	Remarks
Temperature	25℃	85℃	Normal	-
Humidity	65%	95%	Normal	-