# Display Elektronik GmbH

DATA SHEET

**TFT MODULE** 

# **DEM 240204A VMH-PW-N**

# 1,2" TFT (Round Design)

**Product Specification** 

Ver.: 2

# **Revision History**

Revision	Date	Originator	Detail	Remarks
0	28.06.2018	МН	Initial Release	-
1	30.08.2018	МН	Modify Weight  Modify Luminance & Chromacity  Modify Outline Drawing	P4 P6 P23
2	16.10.2018	MH	Modify Outline Drawing	P23

# **Table of Contents**

No.	Item	Page
1. G	Seneral Description	4
2. N	Nodule Parameter	4
3. A	bsolute Maximum Ratings	4
4. D	OC Characteristics	5
5. B	Backlight Characteristic	5
	5.1. Backlight Characteristics	5
	5.2. Backlighting circuit	5
6. C	Optical Characteristics	6
	6.1. Optical Characteristics	6
	6.2. Definition of Response Time	6
	6.3. Definition of Contrast Ratio	7
	6.4. Definition of Viewing Angles	7
	6.5. Definition of Color Appearance	8
	6.6. Definition of Surface Luminance, Uniformity and Transmittance	8
7. B	Block Diagram and Power Supply	9
8. Ir	nterface Pins Definition	10
9. A	C Characteristics	11
10.	Reset timing	12
11.	Quality Assurance	13
	11.1. Purpose	13
	11.2. Standard for Quality Test	13
	11.3. Nonconforming Analysis & Disposition	13
	11.4. Agreement Items	13
	11.5. Standard of the Product Visual Inspection	14
	11.6. Inspection Specification	14
	11.7. Classification of Defects	18
	11.8. Identification/marking criteria	18
	11.9. Packaging	19
12.	Reliability Specification	20
13.	Precautions and Warranty	21
	13.1. Safety	21
	13.2. Handling	21
	13.3. Storage	21
	13.4. Metal Pin (Apply to Products with Metal Pins)	21
	13.5. Operation	22
	13.6. Static Electricity	22
	13.7. Limited Warranty	22
14.	Outline Drawing	23

# 1. General Description

The specification is a transmissive type color active matrix liquid crystal display (LCD) which uses amorphous thin film transistor (TFT) as switching devices. This product is composed of a TFT-LCD panel, driver IC and a backlight unit.

#### 2. Module Parameter

Features	Details	Unit
Display Size (Diagonal)	1.2" (Round Design)	-
LCD Type	IPS TFT	-
Display Mode	Transmissive / Normal black	-
Resolution	240 x RGB x 204	Pixels
View Direction	FULL VIEW	Best Image
Module Outline	33.66 x 33.02 x 1.50 (Note1)	mm
Active Area	30.94 x 26.32	mm
Pixel Size	0.129 x 0.129	mm
Pixel Arrangement	RGB Vertical Stripe	-
Display Colors	262k	-
Interface	4-Wire SPI Interface	-
Driver IC	ST7789V (Sitronix)	-
With or without touch panel	Without	-
Operating Temperature	-20°C to +70°C	°C
Storage Temperature	-30°C to +80°C	°C
Weight	~2	g

Note 1: Exclusive hooks, posts, FFC/FPC tail etc.

# 3. Absolute Maximum Ratings

Vss=0V, Ta=25°C

Item	Symbol	Min.	Max.	Unit
Supply Voltage	VCC	-0.3	4.6	V
Supply Voltage (Logic)	IOVCC	-0.3	4.6	V
Storage Temperature	Tstg	-30	+80	°C
Operating Temperature	Тор	-20	+70	°C

Note 1: If Ta below 50°C, the maximal humidity is 90%RH, if Ta over 50°C, absolute humidity should be less than 60%RH.

Note 2: The response time will be extremely slow when the operating temperature is around -10°C, and the back ground will become darker at high temperature operating.

# 4. DC Characteristics

Item	Symbol	Min.	Тур.	Max.	Unit
Supply Voltage	VCC	2.4	2.8	3.3	V
Supply Voltage	IOVCC	1.65	1.8	3.3	V
Logic Low Input Voltage	VıL	GND	-	0.3*IOVCC	V
Logic High Input Voltage	ViH	0.7* IOVCC	-	IOVCC	V
Logic Low Output Voltage	Vol	GND	-	0.2* IOVCC	V
Logic High Output Voltage	Vон	0.8* IOVCC	-	IOVCC	V
Current Consumption Normal White	Icc	-	5	-	mA

# 5. Backlight Characteristic


# 5.1. Backlight Characteristics

Item	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Voltage	VF	Ta=25 °C, IF=20mA/LED	2.8	3.2	3.4	V
Forward Current	lF	Ta=25 °C, V <sub>F</sub> =3.2V/LED	-	40	-	mA
Power Dissipation	Pd		-	128	-	mW
Uniformity	Avg		-	80	-	%
LED Lifetime (25° C)	-	- 20.000 30.000 - Hrs				Hrs
Drive Method	Constant Current					
LED Configuration		2 White LED	s in parall	el	•	

Note1: LED Lifetime defined as follows: The final brightness is at 50% of original brightness.

The environmental conducted under ambient air flow, at Ta=25°C $\pm$ 2 °C, 60%RH $\pm$ 5%, I<sub>F</sub>=20mA/LED

# 5.2. Backlighting Circuit

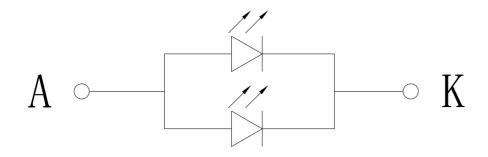

# 6. Optical Characteristics


#### 6.1. Optical Characteristics

Ta=25°C, VCC=2.8V

	Item		Symbol	Condition	S	pecificati	on	Unit
	iter	TI	Symbol	Condition	Min.	Тур.	Max.	Unit
	Luminar	nce on						
<u> </u>	TFT( $I_f$ =20	$TFT(I_f \texttt{=20mA/LED})$		Normally	320	400	-	cd/m²
ppo	Contrast ration	o(See 6.3)	CR	viewing angle	800	1000	-	
Backlight On (Transmissive Mode)	Response Time (See 6.2)		TR+TF	$\theta x = \phi Y = 0^{\circ}$		30	35	ms
nis		Red	XR		0.590	0.640	0.690	
nsr		Reu	YR		0.292	0.342	0.292	
Tra	Chromoticity	Green	XG		0.265	0.315	0.365	
) u	Chromaticity Transmissive	5	YG		0.590	0.640	0.690	
) t	(See 6.5)	Blue	Хв		0.093	0.143	0.193	
	(366 0.3)	blue	Yв		0.048	0.098	0.148	
ac <del>k</del>		White	Xw		0.263	0.313	0.363	
a		VVIIILE	Yw		0.326	0.376	0.426	
	Viewing	Horizontal	θx+		70	80	-	
		i ionzoniai	θх-	Center CR≥10	70	80	-	Deg.
	Angle (See 6.4) Vertical φ	φY+	Center CR210	70	80	-	Deg.	
	(366 0.4)	vertical	φY-		70	80	-	
	NTSC Ratio	o(Gamut)			65	70	-	%

## 6.2. Definition of Response Time

#### 6.2.1. Normally Black Type (Negative)

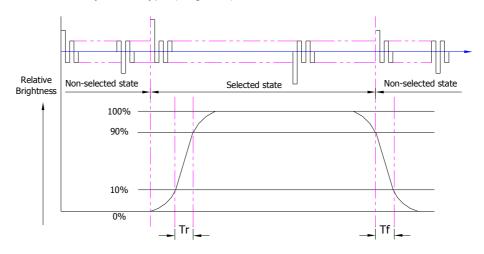


Tr is the time it takes to change form non-selected stage with relative luminance 10% to selected state with relative luminance 90%;

Tf is the time it takes to change from selected state with relative luminance 90% to non-selected state with relative luminance 10%.

Note: Measuring machine: LCD-5100

#### 6.2.2. Normally White Type (Positive)

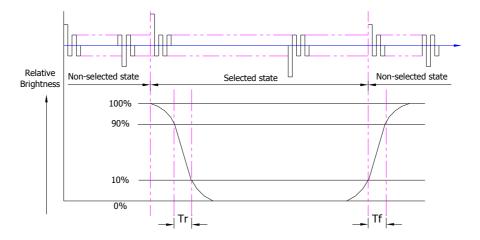

Tr is the time it takes to change form non-selected stage with relative luminance 90% to selected state with relative luminance 10%;

Tf is the time it takes to change from selected state with relative luminance 10% to non-selected state with relative luminance 90%;

Note: Measuring machine: LCD-5100 or EQUI


#### 6.3. Definition of Contrast Ratio

Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment	Eldim or Equivalent
Measuring Point Diameter	3mm//1mm
Measuring Point Location	Active Area centre point
Toot nottorn	A: All Pixels white
Test pattern	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel


#### 6.4. Definition of Viewing Angles

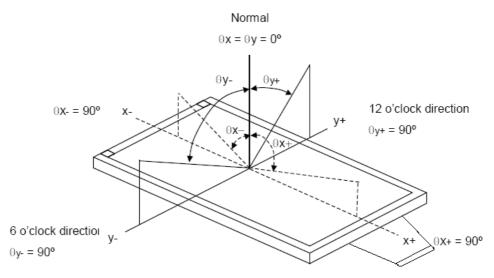

Measuring machine: LCD-5100 or EQUI

#### 6.5. Definition of Color Appearance

R, G, B and W are defined by (x, y) on the IE chromaticity diagram NTSC=area of RGB triangle/area of NTSC triangleX100%

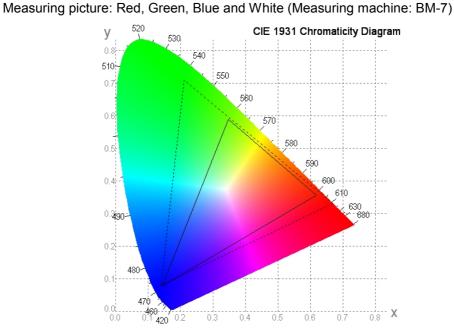


#### 6.6. Definition of Surface Luminance, Uniformity and Transmittance


Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

- 6.6.1. Surface Luminance:  $L_V$  = average ( $L_{P1}$ : $L_{P9}$ )
- 6.6.2. Uniformity = Minimal  $(L_{P1}:L_{P9})$  / Maximal  $(L_{P1}:L_{P9})$  \* 100%
- 6.6.3. Transmittance =  $L_V$  on LCD /  $L_V$  on Backlight \* 100%

Note: Measuring machine: BM-7

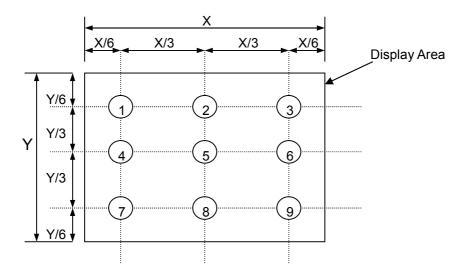

# 7. Block Diagram and Power Supply

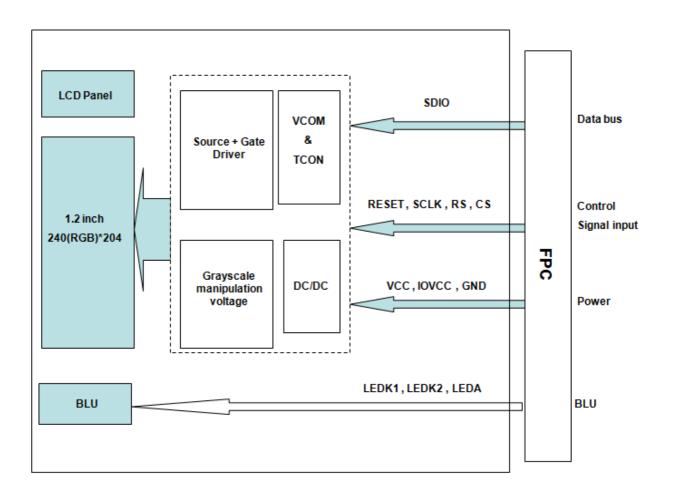


# 8. Interface Pins Definition

No.	Symbol	Function	Remark
1	LEDK2	LED Cathode.	
2	LEDK1	LED Cathode.	
3	LEDA	LED Anode.	
4	GND	Ground.	
		Tearing effect signal is used to synchronize MCU to frame	
5	FMARK	memory writing	
		-If not used, please let this pin open	
6	SDIO	Serial data input/output.	
7	SCLK	Serial clock.	
8	RS	Display data/command selection pin in 4-line serial interface	
9	CS	Chip select	
10	RESET	Reset signal.	
11	IOVCC	Power Supply for I/O System.	
12	VCC	Power Supply for Analog, Digital System and Booster Circuit	
13	GND	Ground.	


# 9. AC Characteristics

# **Serial Interface Characteristics (4-line serial):**

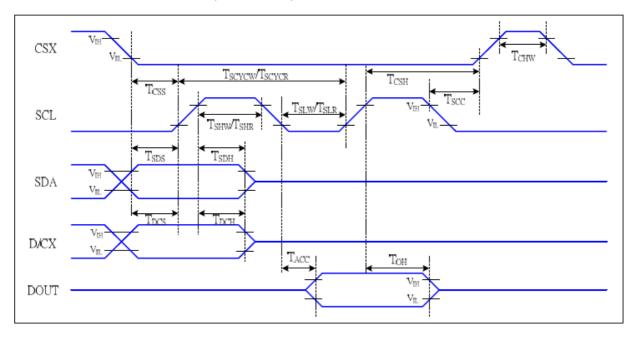

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
	T <sub>css</sub>	Chip select setup time (write)	15		ns	
	T <sub>CSH</sub>	Chip select hold time (write)	15		ns	
CSX	T <sub>CSS</sub>	Chip select setup time (read)	60		ns	
	T <sub>scc</sub>	Chip select hold time (read)	65		ns	
	T <sub>CHW</sub>	Chip select "H" pulse width	40		ns	
	T <sub>SCYCW</sub>	Serial clock cycle (Write)	66		ns	write command 9 data
	T <sub>SHW</sub>	SCL "H" pulse width (Write)	15		ns	-write command & data
SCL	T <sub>SLW</sub>	SCL "L" pulse width (Write)	15		ns	Talli
SCL	T <sub>SCYCR</sub>	Serial clock cycle (Read)	150		ns	
	T <sub>SHR</sub>	SCL "H" pulse width (Read)	60		ns	-read command & data ram
	T <sub>SLR</sub>	SCL "L" pulse width (Read)	60		ns	Talli
D/CX	T <sub>DCS</sub>	D/CX setup time	10		ns	
DICX	T <sub>DCH</sub>	D/CX hold time	10		ns	
SDA	T <sub>SDS</sub>	Data setup time	10		ns	
(DIN)	T <sub>SDH</sub>	Data hold time	10		ns	
DOUT	T <sub>ACC</sub>	Access time	10	50	ns	For maximum CL=30pF
DOOT	Тон	Output disable time	15	50	ns	For minimum CL=8pF

# 10. Reset timing

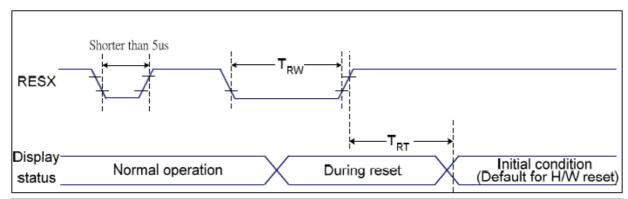


Related Pins	Symbol	Parameter	MIN	MAX	Unit
	TRW	Reset pulse duration	10	-	us
RESX	TRT	Reset cancel	-	5 (Note 1, 5)	ms
	11(1	Neset Calicel		120 (Note 1, 6, 7)	ms

#### Notes:

- The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (tRT) within 5 ms after a rising edge of RESX.
  - 2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

- 3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode.) and then return to Default condition for Hardware Reset.
  - 4. Spike Rejection also applies during a valid reset pulse as shown below:

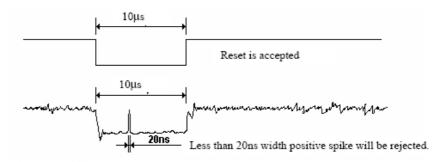

- 5. When Reset applied during Sleep In Mode.
- 6. When Reset applied during Sleep Out Mode.
- It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.

# 11. Quality Assurance

#### 11.1.Purpose

This standard for Quality Assurance assures the quality of LCD module products supplied to customer.

#### 11.2. Standard for Quality Test

11.2.1. Sampling Plan:

GB2828.1-2012

Single sampling, general inspection level II

11.2.2. Sampling Criteria:

Visual inspection: AQL 1.5%

Electrical functional: AQL 0.65%.

11.2.3. Reliability Test:

Detailed requirement refer to Reliability Test Specification.

#### 11.3. Nonconforming Analysis & Disposition

- 11.3.1. Nonconforming analysis:
  - 11.3.1.1. Customer should provide overall information of non-conforming sample for their complaints.
  - 11.3.1.2. After receipt of detailed information from customer, the analysis of nonconforming parts usually should be finished in one week.
  - 11.3.1.3. If cannot finish the analysis on time, customer will be notified with the progress status.
- 11.3.2. Disposition of nonconforming:
  - 11.3.2.1. Non-conforming product over PPM level will be replaced.
  - 11.3.2.2. The cause of non-conformance will be analyzed. Corrective action will be discussed and implemented.

#### 11.4. Agreement Items


Shall negotiate with customer if the following situation occurs:

- 11.4.1. There is any discrepancy in standard of quality assurance.
- 11.4.2. Additional requirement to be added in product specification.
- 11.4.3. Any other special problem.

#### 11.5. Standard of the Product Visual Inspection

#### 11.5.1. Appearance inspection:

- 11.5.1.1. The inspection must be under illumination about 1000 1500 lx, and the distance of view must be at 30cm ± 2cm.
- 11.5.1.2. The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.
- 11.5.1.3. Definition of area: A Zone: Active Area, B Zone: Viewing Area,

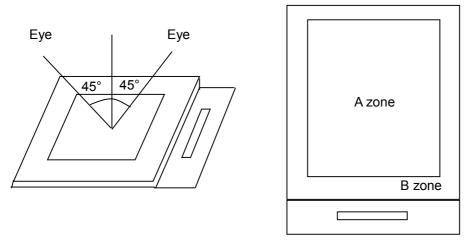

#### 11.5.2. Basic principle:

11.5.2.1. A set of sample to indicate the limit of acceptable quality level must be discussed by both us and customer when there is any dispute happened.

11.5.2.2. New item must be added on time when it is necessary.

#### 11.6.Inspection Specification

No.	Item	Criteria (Unit: mm)		
01	Black / White spot Foreign material (Round type) Pinholes Stain Particles inside cell. (Minor defect)	b a	Area Size  φ≤0.10  0.10<φ≤0.15  0.15<φ≤0.25	Acc. Qty Ignore 2 1
			0.25<φ	0
		( ) (0	Total	2 no include φ≤ 0.10
		$\varphi$ = (a + b)/2		
		Distance between 2 defects should more than 3mm apart.		

			Display Area	Total		
		Bright dot	0	0	Noted	
	Florida ID ( )	Dark dot	N≤2	N≤2	Note1	
02	Electrical Defect	Total dot	N≤2	N≤2	<b>1</b>	
	(Minor defect)	Mura	Not visible through 5	5% ND filters.	Note 2	
		Remark:  1. Bright dot cau	_			
04	Black and White line Scratch Foreign material (Line type)	L	W (*)	L		
	(Minor defect)	Length	Width	Acc. Qty		
		/	W ≦ 0.03	Ignore		
		L ≦ 2.5	$0.03~<~W~\leq~0.05$	3		
		L ≦ 2.5	$0.05 < W \le 0.10$	2		
		/	0.1 < W	0		
			Total	3		
			2 defects should more t e back of the display are		t. Scratches not	
05	Glass Crack (Minor defect)	Crack is potential to enlarge, any type is not allowed.				

	Glass Chipping Pad Area:			
06	(Minor defect)	Length and Width	Acc. Qty	
		c > 3.0, b< 1.0	1	
		c< 3.0, b< 1.0	3	
00		a <glass td="" thicknes<=""><td></td></glass>		
	b			
	Glass Chipping Rear of Pad Area: (Minor defect)			
	,	Length and Width	Acc. Qty	
		c > 3.0, b< 1.0	1	
07		c< 3.0, b< 1.0	2	
		c< 3.0, b< 0.5	4	
		a <glass td="" thickness<=""></glass>		
	b garage			
	Glass Chipping Except Pad Area: (Minor defect)			
		Length and Width	Acc. Qty	
		c > 3.0, b< 1.0	1	
80		c< 3.0, b< 1.0	2	
		c< 3.0, b< 0.5	4	
		a <glass td="" thicknes<=""><td>ss</td></glass>	ss	
	a			
	Glass Corner Chipping: (Minor defect)			
09	_	Length and Width	Acc. Qty	
		c < 3.0, b< 3.0	Ignore	
		a <glass td="" thickness<=""></glass>		
	ba			

	Class Dur		1				
	Glass Burr:						
10	(Minor defect)				41-	A O1	
				Leng		Acc. Qty	
				F < 1	.0	Ignore	
	F						
			Glass dimer		ect assemb	le and module	
	FPC Defect:						
	(Minor defect)						
	,		11.1 D	11.1 Dent, pinhole width a <w 3.<="" td=""></w>			
44	$a \rightarrow c$ $w \rightarrow c$		(w: circuitry width.)				
11			11.2 Open circuit is unacceptable.				
			11.3 No oxidation, contamination and distortion.				
			Dia	meter	Acc. Qt	h.	
				0.20			
12	Bubble on Polarizer			<φ≤0.30	Ignore 4	-	
	(Minor defect)			<φ≤0.50 <φ≤0.50	1		
				<φ≤0.50 0 < φ	None		
			0.0	Ψ	None		
			Dia	meter	Acc Of	hv.	
13	Dent on Polarizer (Minor defect)			0.20	Acc. Qt		
				<φ≤0.30	Ignore 4	-	
				<φ≤0.50 <φ≤0.50	1		
	ĺ			<φ≤0.50 0 < φ	None		
		L	0.0	υ `Ψ	None		
		14.1 No rust, disto	rtion on th	ne Bezel			
14	Bezel	14.2 No visible fing			ar contamin	aation	
		17.2 INO VISIDIE IIII	gerpinio,	stairis Ur Utille	o Containin	iauon.	

Touch Panel	D: Diameter W: width L: length  15.1 Spot: D<0.25 is acceptable  0.25≤D≤0.4  2dots are acceptable and the distance between defects should more than 10 mm.  D>0.4 is unacceptable  15.2 Dent: D>0.40 is unacceptable  15.3 Scratch: W≤0.03, L≤10 is acceptable,  0.03 <w≤0.10, 10="" 2="" acceptable="" between="" defects="" distance="" is="" l≤10="" mm.="" more="" should="" than="" w="">0.10 is unacceptable.</w≤0.10,>
PCB	16.1 No distortion or contamination on PCB terminals.  16.2 All components on PCB must same as documented on the BOM/component layout.  16.3 Follow IPC-A-600F.
Soldering	Follow IPC-A-610C standard
Electrical Defect (Major defect)	The below defects must be rejected.  18.1 Missing vertical / horizontal segment,  18.2 Abnormal Display.  18.3 No function or no display.  18.4 Current exceeds product specifications.  18.5 LCD viewing angle defect.  18.6 No Backlight.  18.7 Dark Backlight.  18.8 Touch Panel no function.
	PCB Soldering Electrical Defect

Remark: LCD Panel Broken shall be rejected. Defect out of LCD viewing area is acceptable.

# 11.7. Classification of Defects

- 11.7.1. Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.
- 11.7.2. Two minor defects are equal to one major in lot sampling inspection.


# 11.8.Identification/marking criteria

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

#### 11.9. Packaging

- 11.9.1. There should be no damage of the outside carton box, each packaging box should have one identical label.
- 11.9.2. Modules inside package box should have compliant mark.
- 11.9.3. All direct package materials shall offer ESD protection

Note1: Bright dot is defined as the defective area of the dot is larger than 50% of one sub-pixel area.

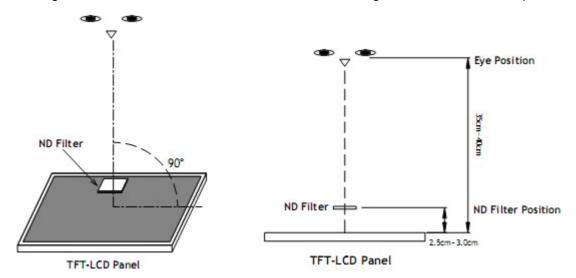

Bright dot: The bright dot size defect at black display pattern. It can be recognized by 2% transparency of filter when the distance between eyes and panel is  $350 \text{mm} \pm 50 \text{mm}$ .

Dark dot: Cyan, Magenta or Yellow dot size defect at white display pattern. It can be recognized by 5% transparency of filter when the distance between eyes and panel is  $350 \text{mm} \pm 50 \text{mm}$ .

**Note2:** Mura on display which appears darker / brighter against background brightness on parts of display area.

# 12. Reliability Specification

No	Item	Condition	Quantity	Criteria
1	High Temperature Operating	+70°C, 96Hrs	2	GB/T2423.2 -2008
2	Low Temperature Operating	-20°C, 96Hrs	2	GB/T2423.1 -2008
3	High Humidity	+40°C, 90%RH, 96Hrs	2	GB/T2423.3 -2006
4	High Temperature Storage	+80°C, 96Hrs	2	GB/T2423.2 -2008
5	Low Temperature Storage	-30°C, 96Hrs	2	GB/T2423.1 -2008
6	Thermal Cycling Test	-20°C, 60min~+70°C, 60min, 20 cycles.	2	GB/T2423.22 -2012
7	Packing vibration	Frequency range:10Hz~50Hz Acceleration of gravity:5G X, Y, Z 30 min for each direction.	2	GB/T5170.14 -2009
8	Electrical Static Discharge	Air: $\pm$ 4kV 150pF/330 $\Omega$ 5 times	2	GB/T17626.2
		Contact: $\pm$ 2kV 150pF/330 $\Omega$ 5 times		-2006
9	Drop Test (Packaged)	Height:80 cm,1 corner, 3 edges, 6 surfaces.	2	GB/T2423.8 -1995

Note1. No defection cosmetic and operational function allowable.

Note2. Total current Consumption should be below double of initial value

# 13. Precautions and Warranty

#### 13.1. Safety

- 13.1.1. The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.
- 13.1.2. Since the liquid crystal cells are made of glass, do not apply strong impact on them. Handle with care.

#### 13.2. Handling

- 13.2.1. Reverse and use within ratings in order to keep performance and prevent damage.
- 13.2.2. Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

#### 13.3. Storage

- 13.3.1. Do not store the LCD module beyond the specified temperature ranges.
- 13.3.2. Strong light exposure causes degradation of polarizer and color filter.

#### 13.4. Metal Pin (Apply to Products with Metal Pins)

13.4.1. Pins of LCD and Backlight

13.4.1.1. Solder tip can touch and press on the tip of Pin LEAD during the soldering

13.4.1.2. Recommended Soldering Conditions

Solder Type: Sn96.3~94-Ag3.3~4.3-Cu0.4~1.1

Maximum Solder Temperature: 370°C

Maximum Solder Time: 3s at the maximum temperature


Recommended Soldering Temp: 350±20 ℃

Typical Soldering Time: ≤3s

13.4.1.3. Solder Wetting

Solder Pin Lead

Recommended



Not Recommended

#### 13.4.2. Pins of EL

- 13.4.2.1. Solder tip can touch and press on the tip of EL leads during soldering.
- 13.4.2.2. No Solder Paste on the soldering pad on the motherboard is recommended.
- 13.4.2.3. Recommended Soldering Conditions

Solder type: Nippon Alimit Leadfree SR-34, size 0.5mm

Recommended Solder Temperature: 270~290 ℃


Typical Soldering Time: ≤2s

Minimum solder distance from EL lamp (body):2.0mm

13.4.2.4. No horizontal press on the EL leads during soldering.

 $13.4.2.5.\,180^\circ$  bend EL leads three times is not allowed.

#### 13.4.2.6. Solder Wetting



EL pin SOLDER PCB

Recommended

Not Recommended

13.4.2.7. The type of the solder iron:





Recommended

Not Recommended

13.4.2.8. Solder Pad



#### 13.5. Operation

- 13.5.1. Do not drive LCD with DC voltage
- 13.5.2. Response time will increase below lower temperature
- 13.5.3. Display may change color with different temperature
- 13.5.4. Mechanical disturbance during operation, such as pressing on the display area, may cause the segments to appear "fractured".
- 13.5.5. Do not connect or disconnect the LCM to or from the system when power is on.
- 13.5.6. Never use the LCM under abnormal condition of high temperature and high humidity.
- 13.5.7. Module has high frequency circuits. Sufficient suppression to the electromagnetic interface shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- 13.5.8. Do not display the fixed pattern for long time (we suggest the time not longer than one hour) because it may develop image sticking due to the TFT structure.


#### 13.6. Static Electricity

- 13.6.1. CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.
- 13.6.2. The normal static prevention measures should be observed for work clothes and benches.
- 13.6.3. The module should be kept into anti-static bags or other containers resistant to static for storage.

#### 13.7. Limited Warranty

- 13.7.1. Our warranty liability is limited to repair and/or replacement. We will not be responsible for any consequential loss.
- 13.7.2. If possible, we suggest customer to use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.
- 13.7.3. After the product shipped, any product quality issues must be feedback within three months, otherwise, we will not be responsible for the subsequent or consequential events.

# 14. Outline Drawing

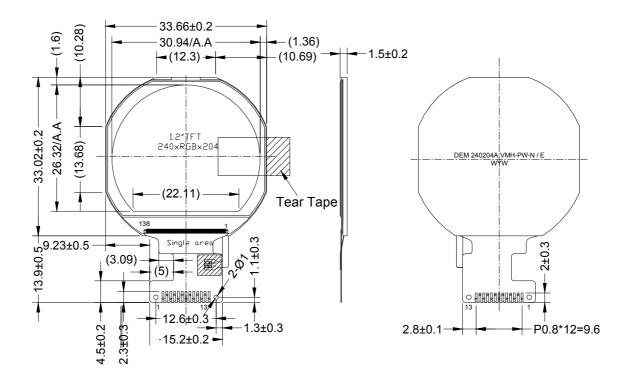

#### NOTES:

- 1.Display Size: 1,2" TFT (Round Design)
- 2. Viewing Direction: Full Viewing
  3. Display Mode: IPS, Transmissive / Normal Black
  4. Operation Temperature: -20°C to +70°C
  5. Storage Temperature: -30°C to +80°C

- 6.Driver IC: ST7789V (Sitronix)
- 7.Power Supply Voltage: 2,8Volt (typ.) 8.Backlight: White (2xLEDs, typ. 3.2V/40mA) Brightness: 400cd/m2 (typ.)

LED Lifetime: typ. 30.000h

\* Unspecification tolerance are ± 0.2mm

Pin assignment		
PIN	SYMBOL	
1	LEDK2	
2	LEDK1	
3	LEDA	
4	GND	
5	FMARK	
6	SDIO	
7	SCLK	
8	RS	
9	CS	
10	RESET	
11	IOVCC	
12	VCC	
13	GND	